




DIMENSIONS (mm) :

Nominal dimensions: 450 x 26

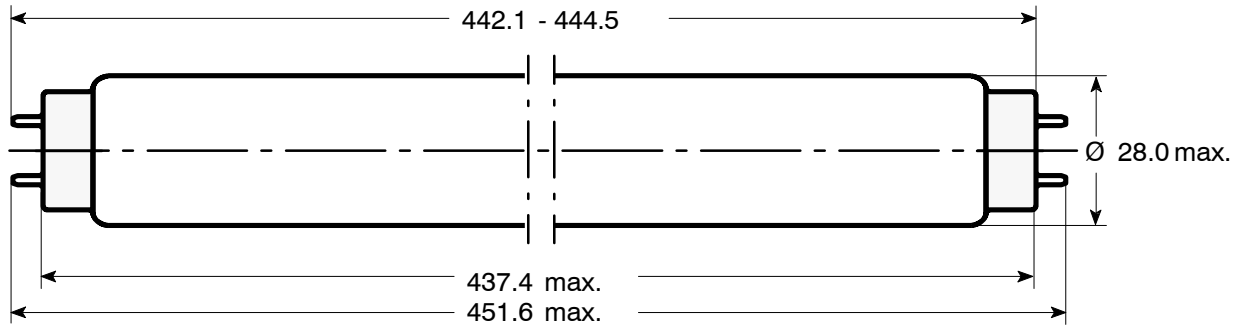

Cap: G13 (IEC61 -1 sheet 7004 -51 -7)

ELECTRICAL DATA

		NOMINAL VALUE	MIN.	MAX.
Frequency	(Hz) :	50		
Lamp nominal wattage	(W) :	15		
Lamp rated wattage	single operation (W) :	15.0	13.8	16.2
	series operation (W) :	32		
Lamp operating voltage	(V) :	55.0	46.0	64.0
Lamp current	single operation (mA) :	310		
	series operation (mA) :	350		
Preheat current	single operation (mA) :	440		
	series operation (mA) :	510		

OPERATING CONDITIONS

		NOMINAL VALUE	MIN.	MAX.
Cap rim temperature	(°C) :			125
Lamp ambient temperature	(°C) :		-20	
Ballast impedance	single operation (Ω/V) :	325/127, 590/220, 621/230, 660/240		
	series operation (Ω/V) :	480/220, 510/230, 540/240		
Starter	single operation	: FS -11, FS -22, COP -22		
	series operation	: FS -22, COP -22		
Burning position	:	any		

LAMP LIFE *

Average life (50% failure rate)	(h) :	14 000
Individual life	(h) :	6 000

RADIATION DATA:

Radiation peak at 365 nm

COLOUR	No.	UV-A irradiance 1m distance bare lamp (315-400nm) (μW/cm²)	UV-B irradiance 1m distance bare lamp (280-315nm) (μW/cm²)	ILCOS-Code
BLACKLIGHT average at 0 h	BL368	38,0	0,05	XUV/FD15-E-G13-26/450


ATTENTION:

This UV energy source emits UV radiation. Avoid exposure to skin and eyes.
Lamps comply with the requirements of IEC/EN 60081 and IEC/EN 61195, respectively.
Starter and ballast must comply with IEC/EN 60155 and IEC/EN 60921, respectively.
* Life test according to IEC/EN 60081, Annex C.



F15W/T8/BL 368

A) Spectral Irradiance vs. Wavelength

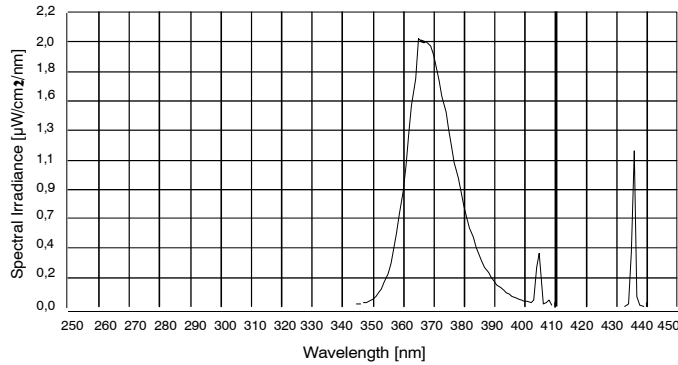


Spectral Irradiance @ 1m distance

UVA = 38,00 µW/cm²
 UVB = 0,05 µW/cm²
 UVB/UVA = 0,13 %
 Wavelength range acc. to CIE
 UVA : 315 - 400 nm
 UVB : 280 - 315 nm

Lamp parameter:

Voltage: 55,0 V
 Current: 0,310 A
 Power: 15,0 W

B) UV Action Curve vs. Wavelength

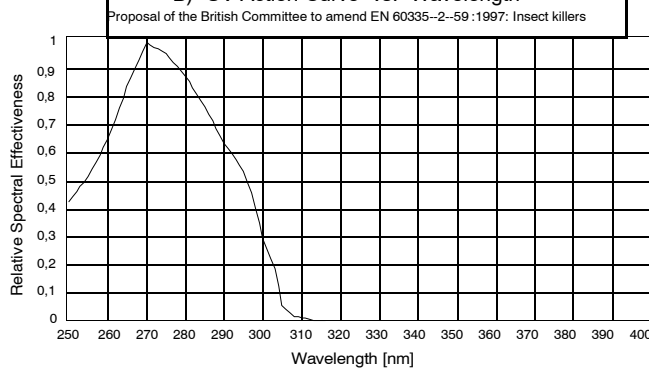


Acc. to EN 60335_2_59 : 1997
 CLC/TC61(GB)579

Total Effective Irradiance @ 1m distance
 Max. 1 mW/m²

Reason: to ensure that the ICNIRP 8 hour effective radiant exposure limit for the eyes and skin of 30 J/m² is not exceeded

C) Total Effective Irradiance vs. Wavelength
 = A) x B)

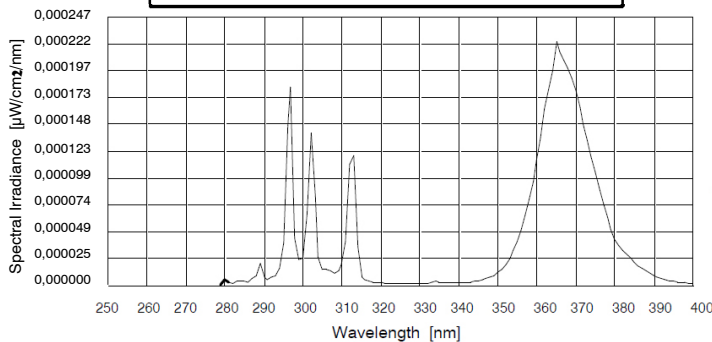

Total Effective Irradiance @ 1m distance
 0,050 mW/m²

NOTE: The above measurements are for Standard Bulbs (LUV015-002-25)
 Sleeved Bulbs have a typical 3.5% loss (LUV015-003-25)

ATTENTION: This UV energy source emits UV radiation. Avoid exposure to skin and eyes.
 Lamps comply with the requirements of IEC/EN 60081 and IEC/EN 61195, respectively.
 Starter and ballast must comply with IEC/EN 60155 and IEC/EN 60921, respectively.
 * Life test according to IEC/EN 60081, Annex C.